


Technical Data Sheet

Product Name: Panno assorbente alimentare DMR-FDPAD4560

Structure:

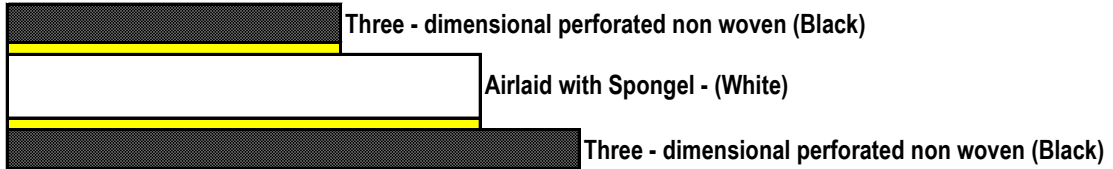

Laminated product by hot melt technology

Characteristic	Unit	Method	Min	Mean *	Max
Grammage	gr/m2	M.I.P.1	306	340	374
Absorption in solution NaCl 0,2%	gr/m2	M.I.A.10	4140		
Thickness	mm	EN 29073		3,6	
Tensile strenght - Dry MD	N/50mm	ISO 9073 - 3		n.r.	
Tensile strenght - Dry CD	N/50mm	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry MD	%	ISO 9073 - 3		n.r.	
Elongation at max. force - Dry CD	%	ISO 9073 - 3		n.r.	

* where not specified, tolerance +/- 10%

MAGIC CAN ASSURE THE PERFORMANCE OF THE PRODUCT UNTIL 12 MONTHS FROM THE DATE OF SHIPMENT IF:

- STORED IN A DRY AND FRESH ATMOSPHERE (HUMIDITY 40-70%) AT AMBIENT TEMPERATURE (5-30°C)
- STORED FAR FROM SOURCE OF HEAT AVOIDING DIRECT EXPOSURE IN THE LIGHT OF THE SUN

Date: 06/04/2023
Rev: 0